



Installation Manual

contents

Luxman PD-171A/AL · PD-191A/AL	MH-10B171A(φ24mm)	----- 1
Luxman PD-171A/AL · PD-191A/AL	MH-9B171A(φ24mm)	----- 2
Luxman PD-171、PD151/151MARKII	MH-9B171(φ24mm)	----- 3
Luxman PD-191A/AL	MH-12S191A(φ30mm)	----- 4
Technics SL-1000R	MH-10S1000R/12S1000R(φ30mm)	----- 5
Transrotor Tourbillon	MH-124STOB(φ30mm)	----- 6
Transrotor ZET3	MH-124SZET3(φ30mm)	----- 7
Clearaudio Ovation	MH-94SCLOV(φ30mm)	----- 8
Clearaudio Performance DC	MH-9BCLPDC(φ24mm)	----- 9
TechDAS Air Force V Premium	MH-12SDQX, 9/10SDQX(φ30mm)	----- 10
Acoustics Solid Machine	MH-124SSM(φ30mm)	----- 11
Acoustics Solid111 System	MH-9/10BSM111 (φ24mm)	----- 12
Solid Clastic wood MPX	MH-9BMPX(φ24mm)	----- 13
YAMAHA GT-5000	MH-GT5000(φ24mm)	----- 14
Simple Plate for Listening Our Tonearm 24	MH-SME24(φ24mm)	----- 15
Simple Plate for Listening Our Tonearm 30	MH-SME30(φ30mm)	----- 16
Base Designed Exclusively for SME Mounting Holes	MH-SME16S(Arm mounting hole φ16mm)	----- 17
AUDIO NOTE GINGA Mounting Hole-Specific Base	MH-GINGA (Arm mounting hole φ16mm)	----- 18
ESOTERIC GrandiosoT1	MH-12T1(φ30mm)	----- 19
YUKI AP-01EM	MH-12YUKI(φ30mm)	----- 20
Head shell	MH-4S	----- 21

*The information will be updated.

* We also accept made-to-order requests. Please consult the manufacturer.

MH-10B171A(ϕ 24mm)

tonearm : 9 inch | B/Bt Type


player model number : Luxman PD-171A/AL · PD-191A/AL

material : stainless steel

mounting hole diameter : ϕ 24mm

size : ϕ 105mm | thickness : 15mm

weight : 0.86kg

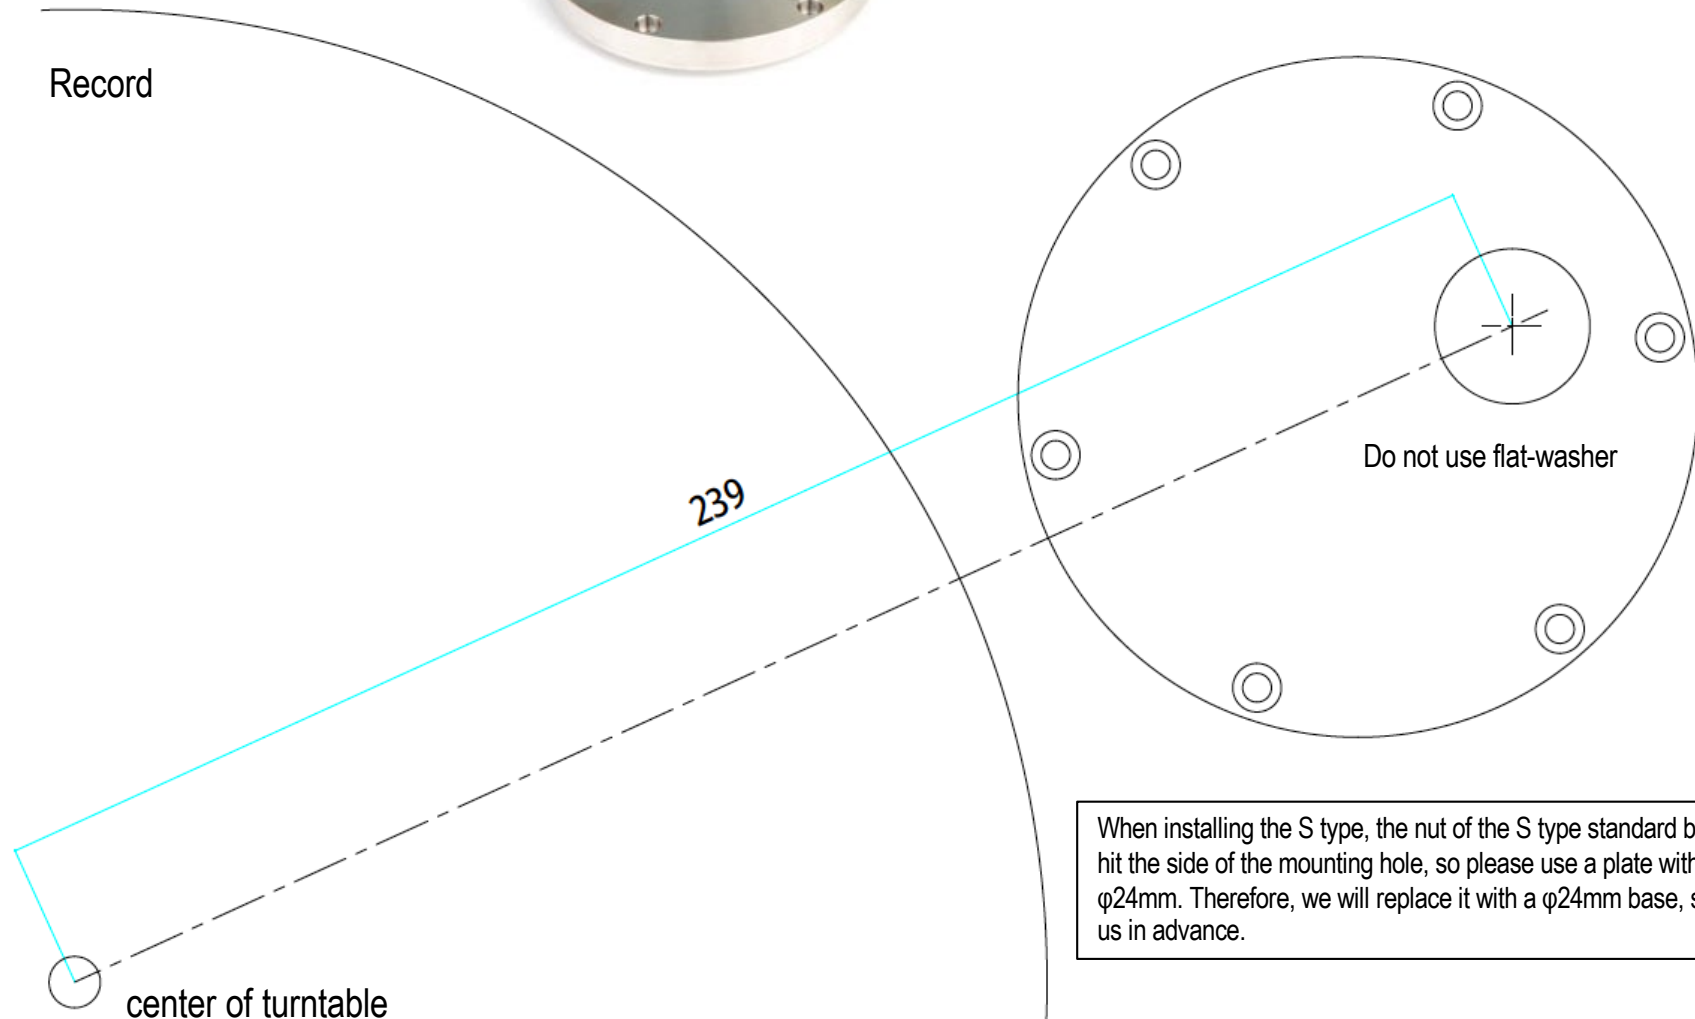

When installing the S type, the nut of the S type standard base (ϕ 30mm) will hit the side of the mounting hole, so please use a plate with a hole diameter of ϕ 24mm. Therefore, we will replace it with a ϕ 24mm base, so please contact us in advance.


MH-9B171A(ϕ 24mm)

tonearm : 10 inch | B/Bt Type
player model number : Luxman PD-171A/AL • PD-191A/AL
material : stainless steel
mounting hole diameter : ϕ 24mm
size : ϕ 105mm | thickness : 15mm
weight : 0.85kg



Record

The position of the hole is the center, so the screw position can be anywhere.

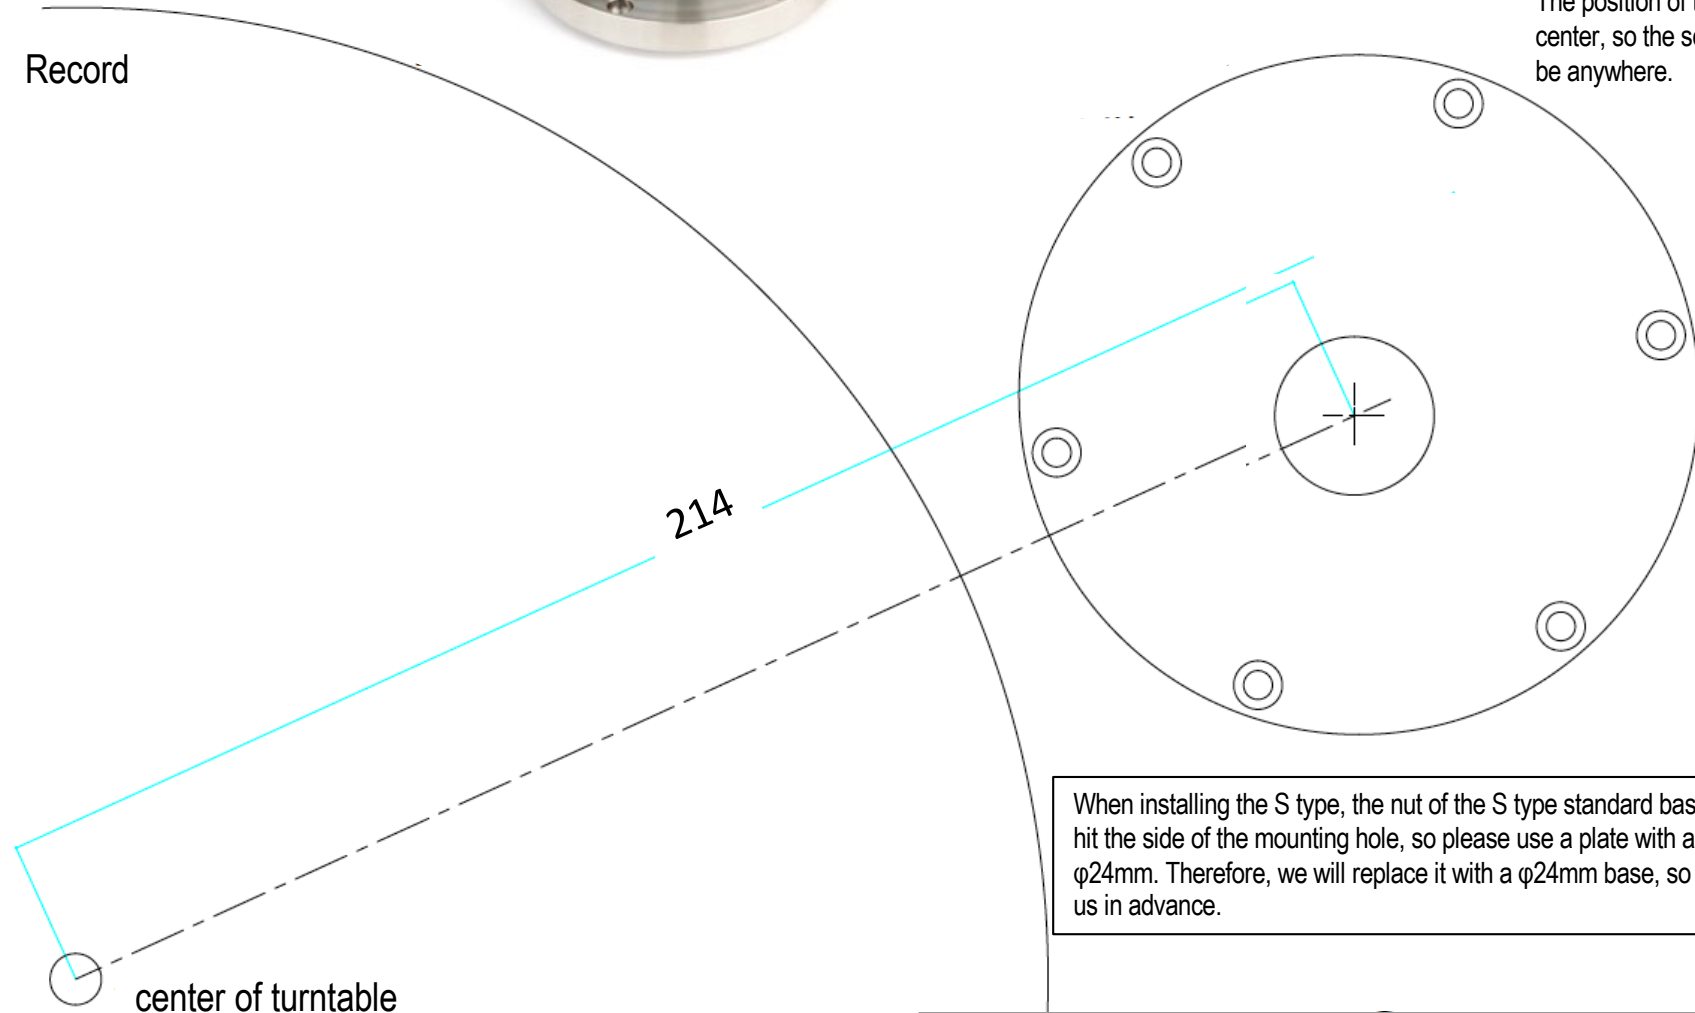

When installing the S type, the nut of the S type standard base (ϕ 30mm) will hit the side of the mounting hole, so please use a plate with a hole diameter of ϕ 24mm. Therefore, we will replace it with a ϕ 24mm base, so please contact us in advance.

MH-9B171 (φ16mm - Arm mounting hole)

tonearm : 9 inch | B/Bt Type

player model number : Luxman PD-171 · PD-151/151 MARK II

material : stainless steel

arm mounting hole diameter : φ16mm | mounting hole diameter : φ35mm

size : φ68mm | thickness : 29mm

weight : 0.3kg



Luxman base



Please switch from Luxman Base to this Base.
Please use the existing screws for mounting.
This base can also be secured to a mounting board using wood screws.



MH-9B171



The MH-9B (9-inch) tonearm mounted on this base.

It can be mounted directly to the board using wood screws (at three points).
A hole diameter of 35 mm is required (please drill the hole 1 mm larger to account for burrs on the board).
If you are using a tonearm such as a JELCO model, you can use this product to mount it.

MH-12S191A (φ30mm)

tonearm : 12 inch | S/Premium SUS/KATANA Type

player model number : Luxman PD-191A/AL

material : stainless steel

mounting hole diameter : φ30mm

size : 127mm x 122mm(Includes mounting parts) | thickness : 14mm

weight : 0.78kg



- (1) Please attach the base to the plate first.
- (2) Fasten the screws to the two holes on the left rear of PD-191A/AL. (Screws are included)
- (3) After attaching the plate, attach the arm.

[Notes]

- When carrying the PD-191A/AL, please hold the PD-191A/AL itself.
- The plate is not strong enough to be carried. It may warp or come loose, causing the player to drop or break.
- **Please be careful not to hold the plate with your hands.**

MH-10/12S1000R (φ30mm) | 10B1000R(φ24mm)

GLANZLAB

tonearm : 10/12 inch | S/Premium SUS/KATANA Type

player model number : Technics SL-1000R


material : stainless steel

size : 171.2mm x 133.1mm(Width of the plate body:144.5mm) | thickness : 24.5mm

weight : 1.78kg | MH-12S1000R:2.23kg


MH-10S1000R

φ30 10inch




MH-12S1000R

φ30 12inch



MH-10B1000R

φ24 10inch



1. Tonearm removal



2. Platter removal

A dedicated tool for removing the flutter is included with the player's accessories.



3. Cabinet removal

The player unit is heavy, so be careful not to apply pressure to the switches when turning it over.




4. Lift the cabinet

Watch out for the cable.



5. With the cabinet removed

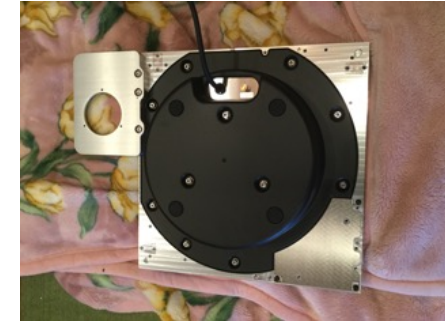


6. Install the 10-inch plate


Mount the MH-10S1000R at a 90-degree angle to the right using the included socket screws.



7. The 12-inch plate is to be mounted on the opposite side. Attach the arm base to the plate as well.

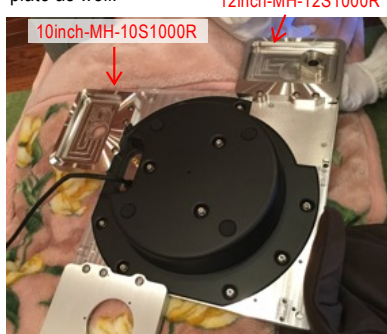

8. Remove the recessed part at the top of the cabinet (the part indicated).

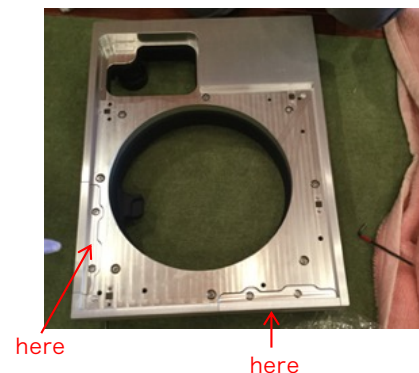

9. With 10-inch and 12-inch plates attached. Setup complete.



10. Installed a 10-inch S-type tonearm.




MH-124STOB (φ30mm)


GLANZLAB

tonearm : 12 inch | S/Premium SUS/KATANA Type
player model number : Transroter Tourbillon
material : stainless steel
mounting hole diameter : φ30mm
size : 172mm x 118mm | thickness : 20mm
weight : 2.1kg


STEP 1 : Remove

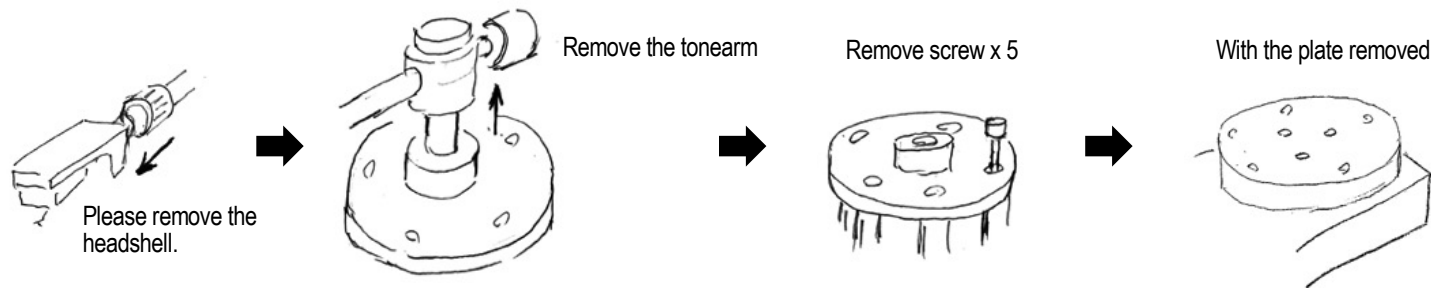

STEP 2 : Install

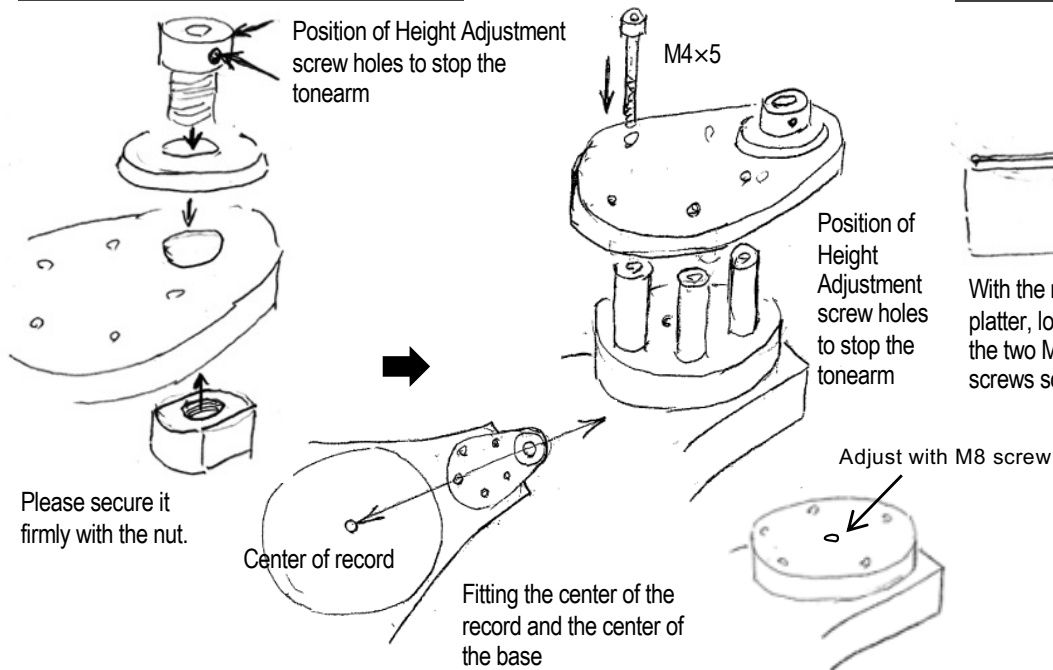

STEP 3 : Adjust

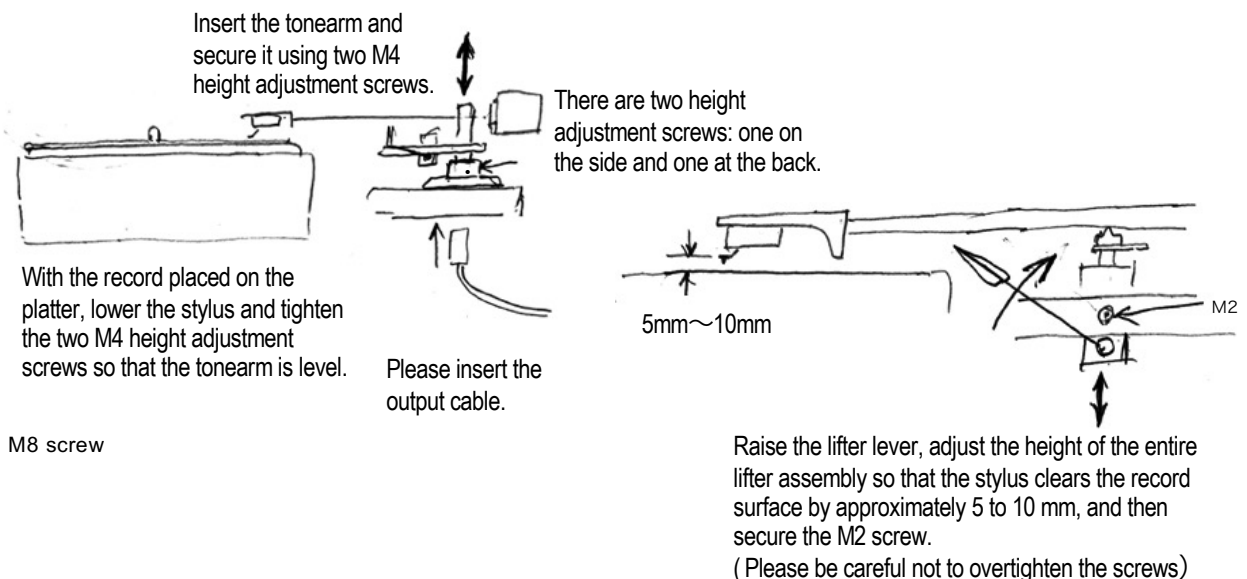


MH-124ZET3 (φ30mm)


GLANZLAB

tonearm : 12 inch | S/Premium SUS/KATANA Type
player model number : Transroter Tourbillon
material : stainless steel
mounting hole diameter : φ30mm
size : 196mm x 108mm | thickness : 20mm
weight : 2.3kg


STEP 1 : Remove

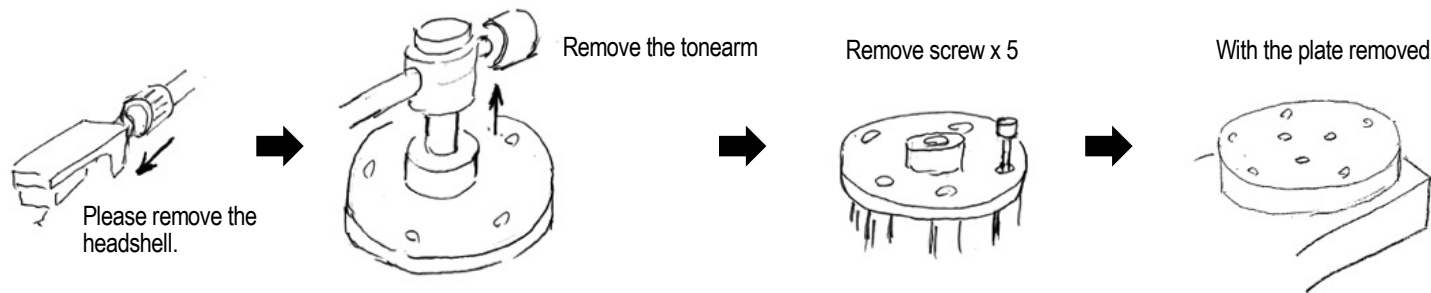

STEP 2 : Install

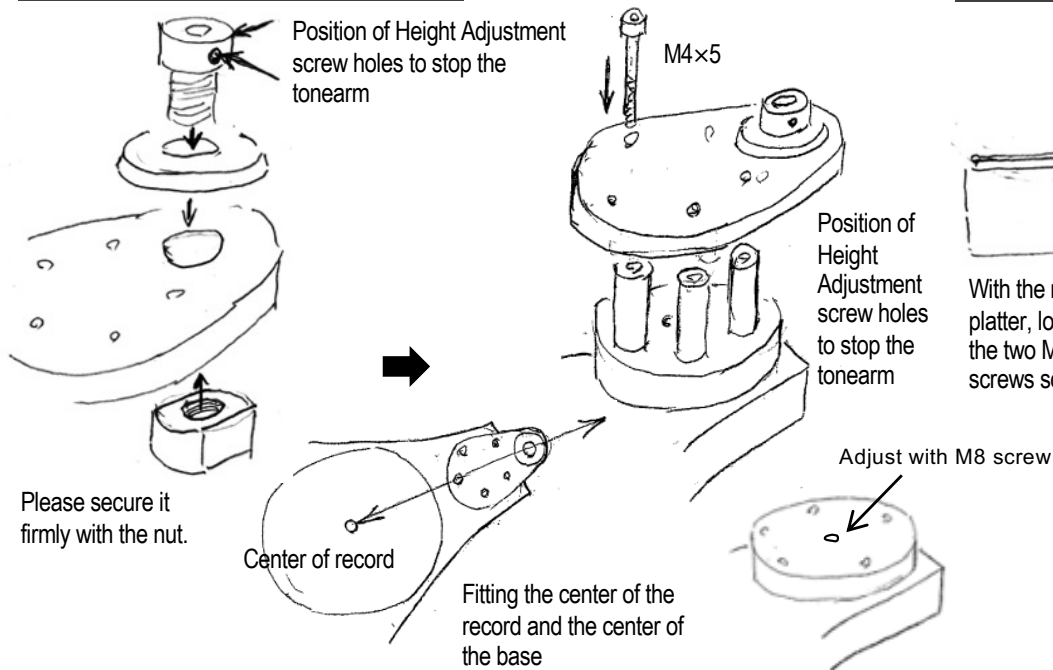

STEP 3 : Adjust

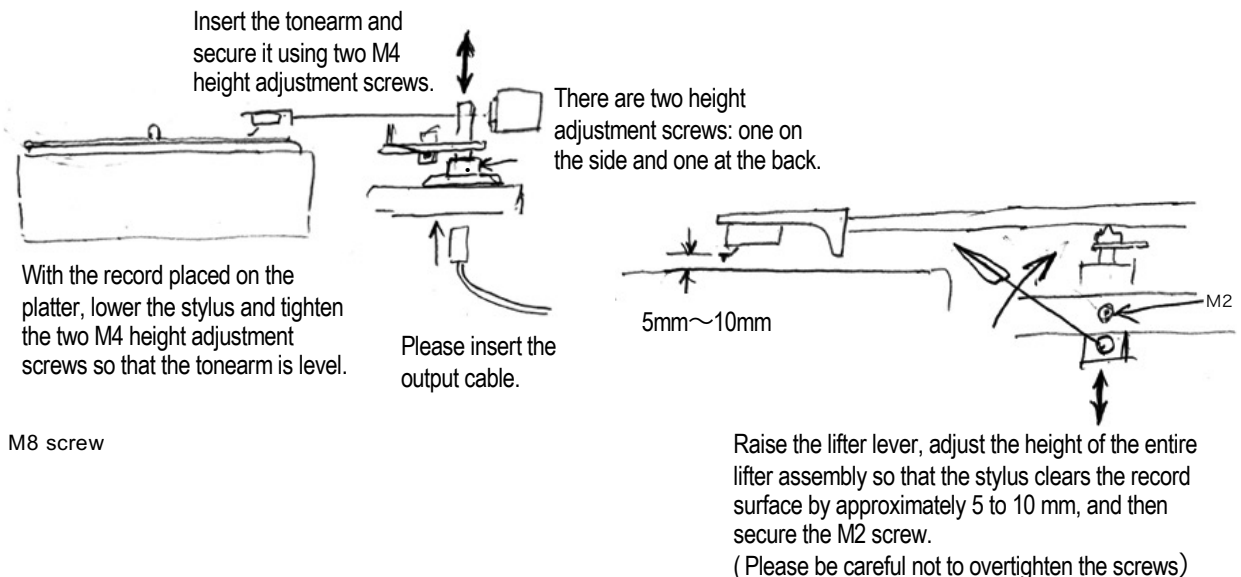


MH-94SCLOV (φ30mm)

tonearm : 9 inch | S/Premium SUS/KATANA Type
player model number : Clearaudio Ovation
material : stainless steel
mounting hole diameter : φ30mm
size : φ98mm | thickness : 20mm
weight : 1.0kg




1. Remove : Remove the six screws and take off the top plate.
2. Install : First, temporarily attach the arm base to the MH-94SCLOV. Temporarily attach the plate to the player board using six screws.
3. Adjustment of arm mounting hole position : Rotate the plate so that the center of the tonearm mounting hole is positioned 214 mm from the center axis of the record.
4. Position of the arm height adjustment screw : Refer to the diagram on the right for the screw holes; tighten the nut on the base to secure it. Do not use the base plate.
5. Securing the plate : Fully tighten the six screws that were temporarily fastened.
6. Tonearm Installation : Attach the tonearm and plug in the cable.

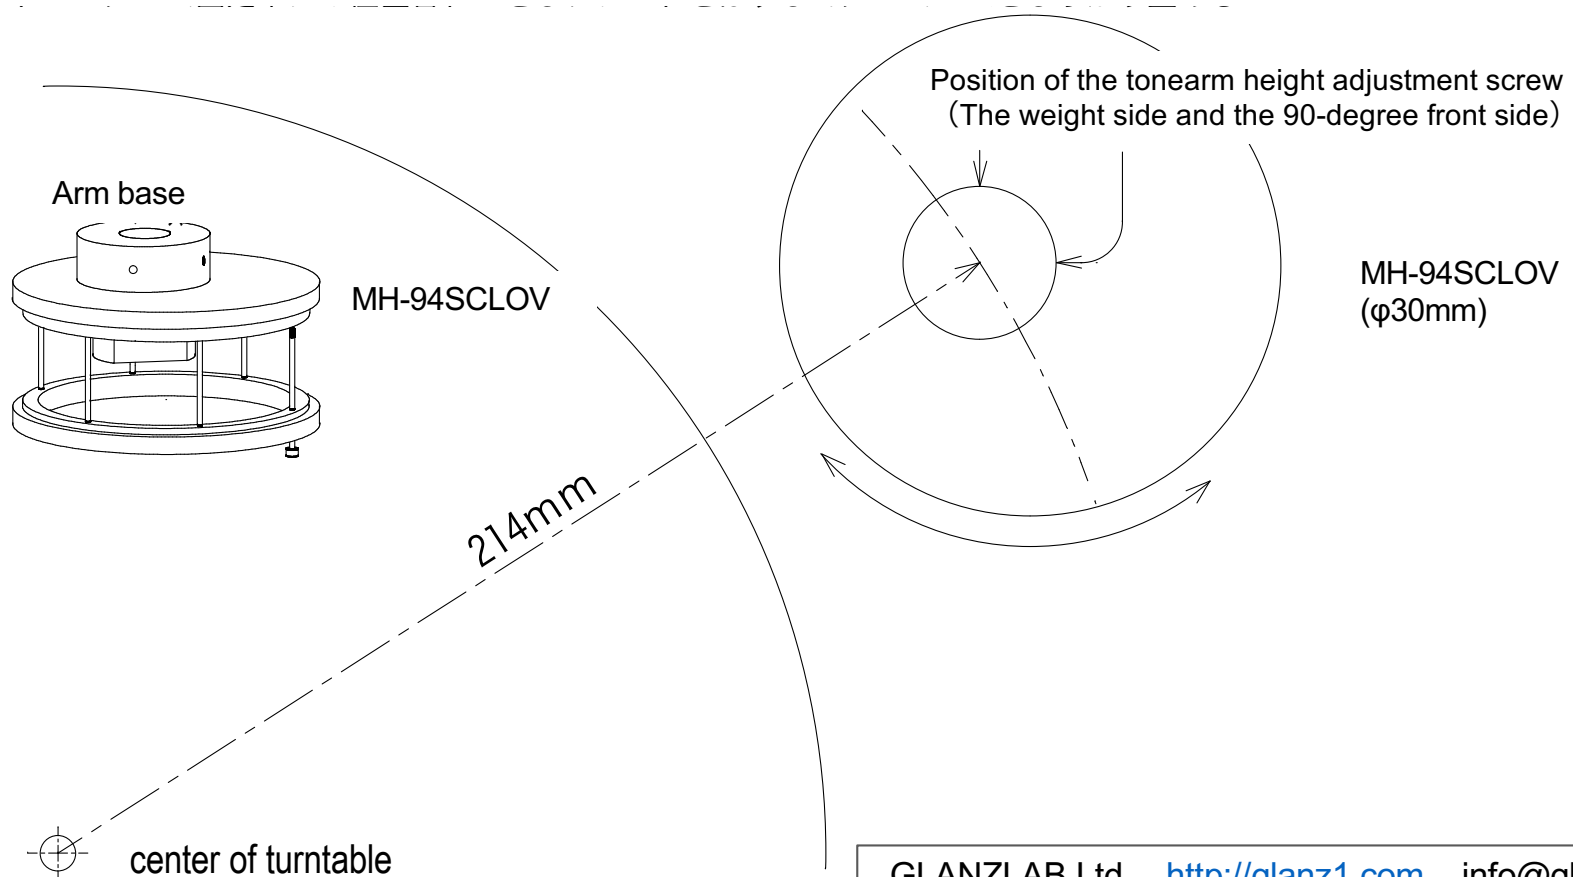


MH-9BCLPDC (φ24mm)

tonearm : 9 inch | B/Bt Type
player model number : Clearaudio Performance DC
material : stainless steel
mounting hole diameter : φ24mm
size : φ98mm | thickness : 20mm
weight : 1.05kg




1. Remove : Remove the six screws and take off the top plate.
2. Install : First, temporarily attach the arm base to the MH-94SCLOV. Temporarily attach the plate to the player board using six screws.
3. Adjustment of arm mounting hole position : Rotate the plate so that the center of the tonearm mounting hole is positioned 214 mm from the center axis of the record.
4. Position of the arm height adjustment screw : Refer to the diagram on the right for the screw holes; tighten the nut on the base to secure it. Do not use the base plate.
5. Securing the plate : Fully tighten the six screws that were temporarily fastened.
6. Tonearm Installation : Attach the tonearm and plug in the cable.

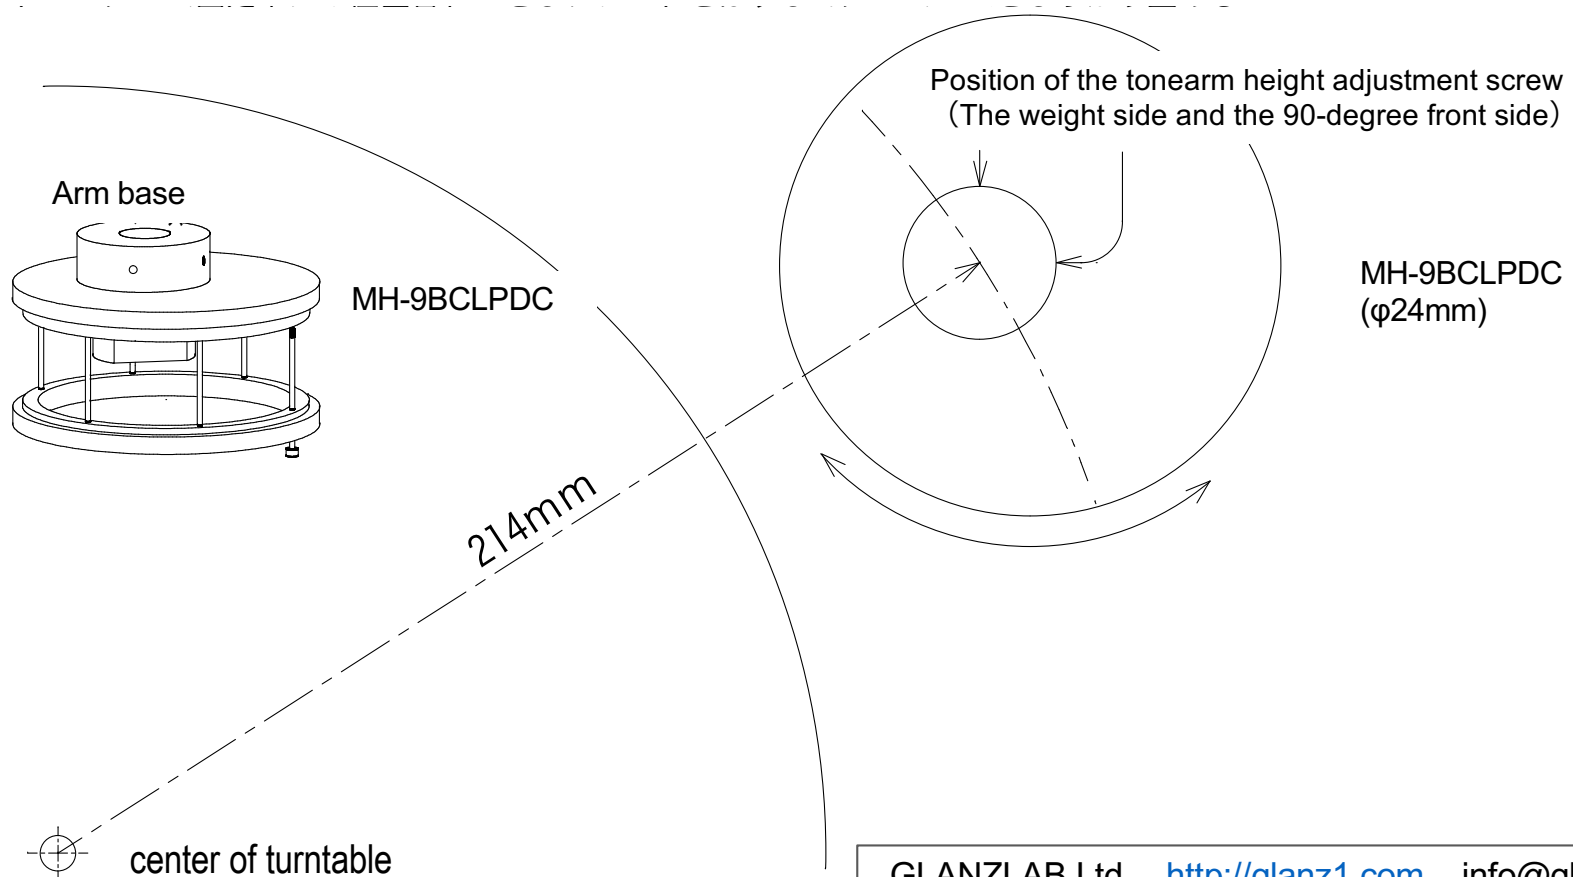

MH-12SDQX($\phi 30\text{mm}$) 9/10SDQX ($\phi 30\text{mm}$)

tonearm : 9, 10, 12 inch | S/Premium SUS/KATANA Type
player model number : TechDAS Air Force V Premium
material : stainless steel
mounting hole diameter : $\phi 30\text{mm}$
(1) 12 inch - size : 167mm x 75mm | thickness : 20mm | weight : 1.24kg
(2) 9, 10 inch - size : 116mm x 75mm | thickness : 20mm | weight : 0.73kg

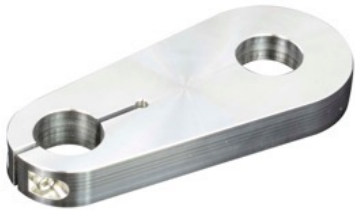

(1) 12 inch

MH-12SDQX



(2) 9, 10 inch


MH-9/10SDQX



Use the MOUNTING TEMPLATE included with the tonearm product to attach and secure the plate.



*This is a MOUNTING TEMPLATE for MH-900S
(For 10 inch tonearm is enclosed the MOUNTING TEMPLATE of MH-1000S)
(For 12 inch tonearm is enclosed the MOUNTING TEMPLATE of MH-1200S.)

MOUNTING TEMPLATE

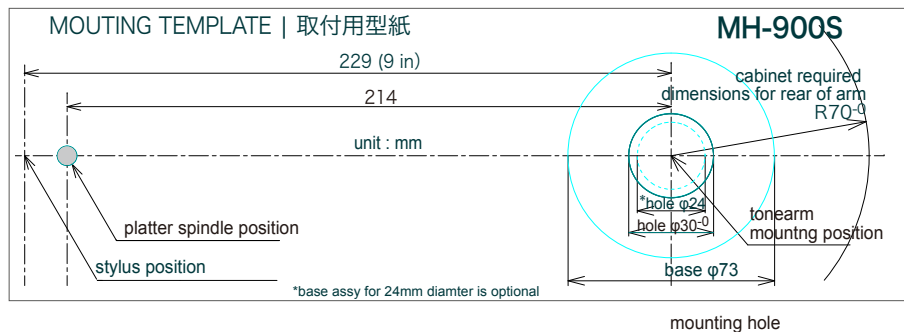


MH-124SSM ($\phi 30\text{mm}$)

tonearm : 10, 12 inch | S/Premium SUS/KATANA Type
player model number : Acoustics Solid Machine
material : stainless steel
mounting hole diameter : $\phi 30\text{mm}$
size : $\phi 90\text{mm}$ | thickness : 18mmt
weight : 0.8kg

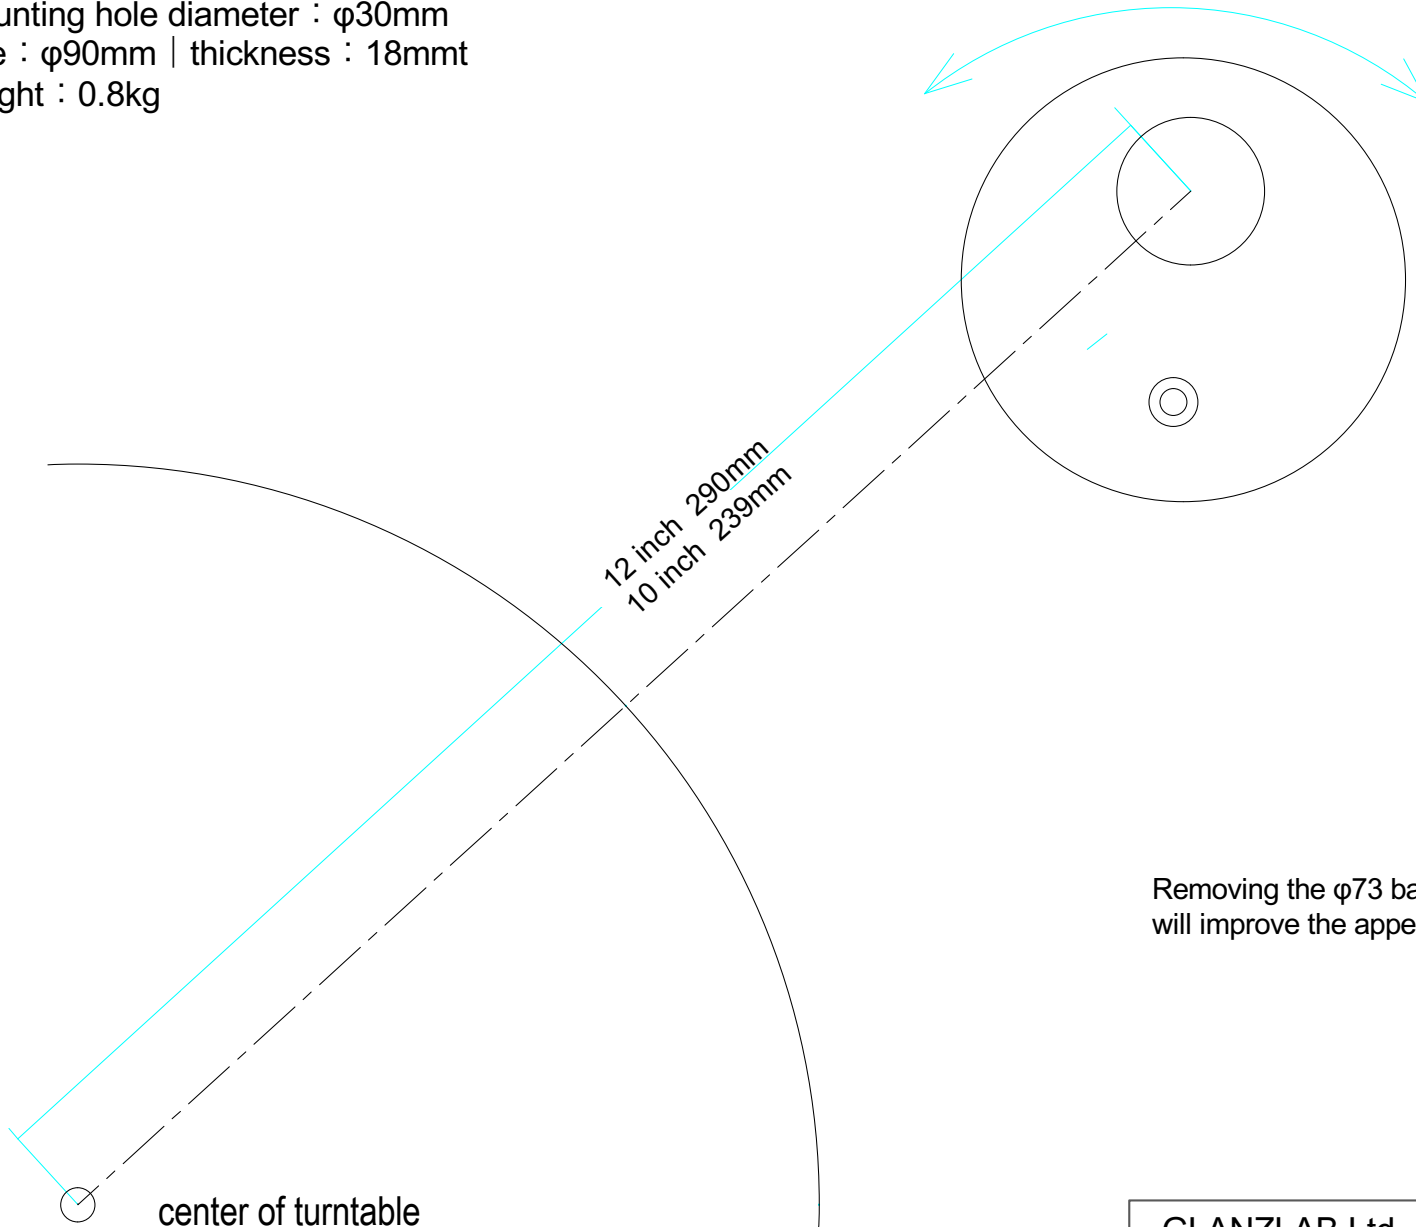

Removing the $\phi 73$ base plate will improve the appearance.

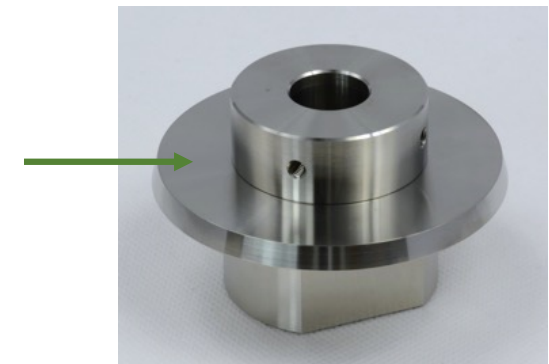

MH-9/10BSM111 ($\phi 24\text{mm}$) *MH-10BSM111



GLANZLAB

tonearm : 9, 10 inch | B/Bt Type
player model number : Acoustics Solid 111 System
material : stainless steel
mounting hole diameter : $\phi 24\text{mm}$
size : $\phi 100\text{mm}$ | thickness : 14mm
weight : 0.8kg



The 9-inch version has the base hole positioned closer to the turntable.

The 10-inch version has the base hole positioned away from the turntable.

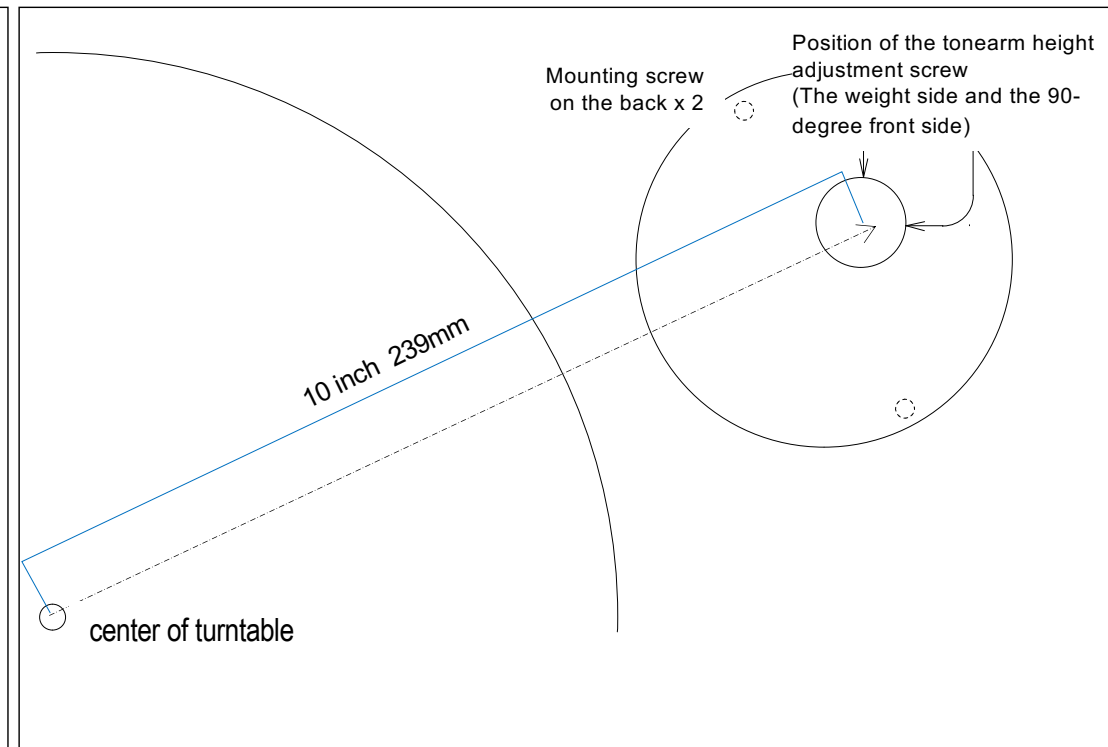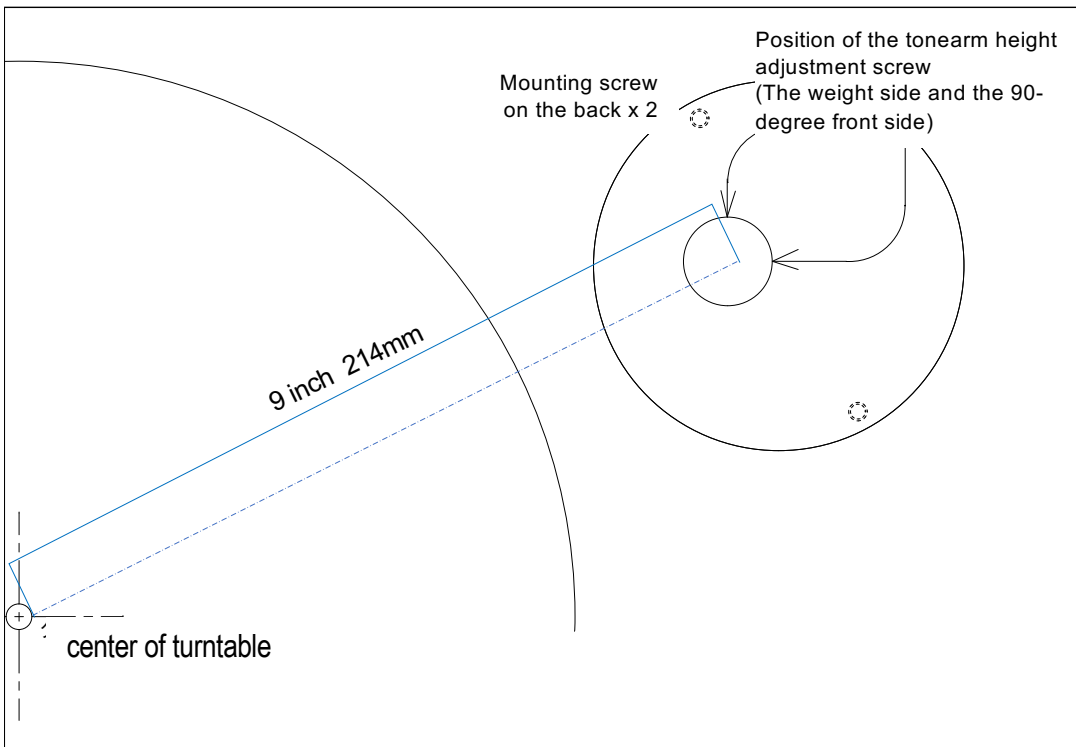

MH-9BMPX (φ24mm) *MH-9/10BMPX


tonearm : 9 inch | B/Bt Type
player model number : Solid Classic Wood MPX
material : stainless steel
mounting hole diameter : φ24mm
size : φ100mm | thickness : 15mm
weight : 0.72kg

1. Plate Installation :

Place the MH-9BMPX in the player mounting hole and secure it with screws.
Please rotate the plate to adjust it to 214 mm. (see ①)

2. Mounting the arm base :

Please refer to the diagram for the location of the height adjustment screw holes. First, attach the arm base and tighten the nut to secure it.

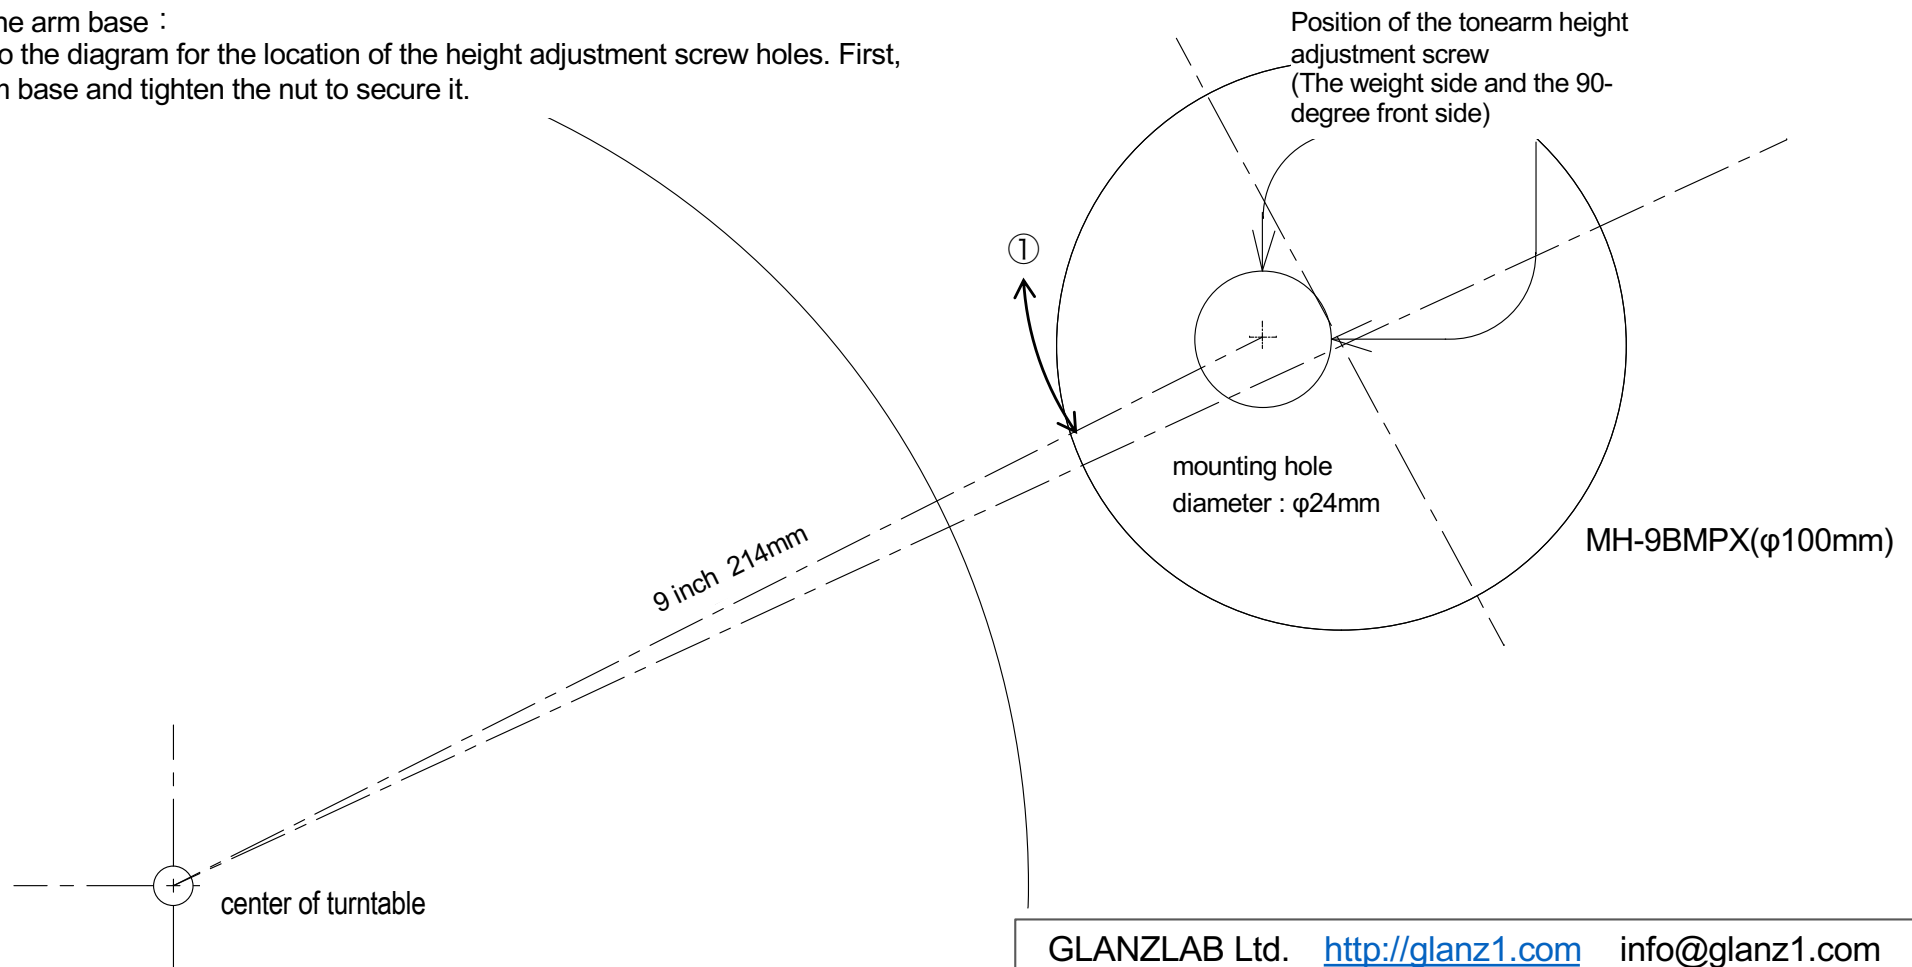


MH-GT5000 ($\phi 24\text{mm}$)

tonearm : 9, 10 inch | B/Bt Type
player model number : YAMAHA GT5000
material : stainless steel
mounting hole diameter : $\phi 24\text{mm}$
size : $\phi 105\text{mm}$ | thickness : 15mm
weight : 0.86kg



Hole location : The 9-inch model is on the left
the 10-inch model is on the right
You can rotate the screw position to mount it either way.

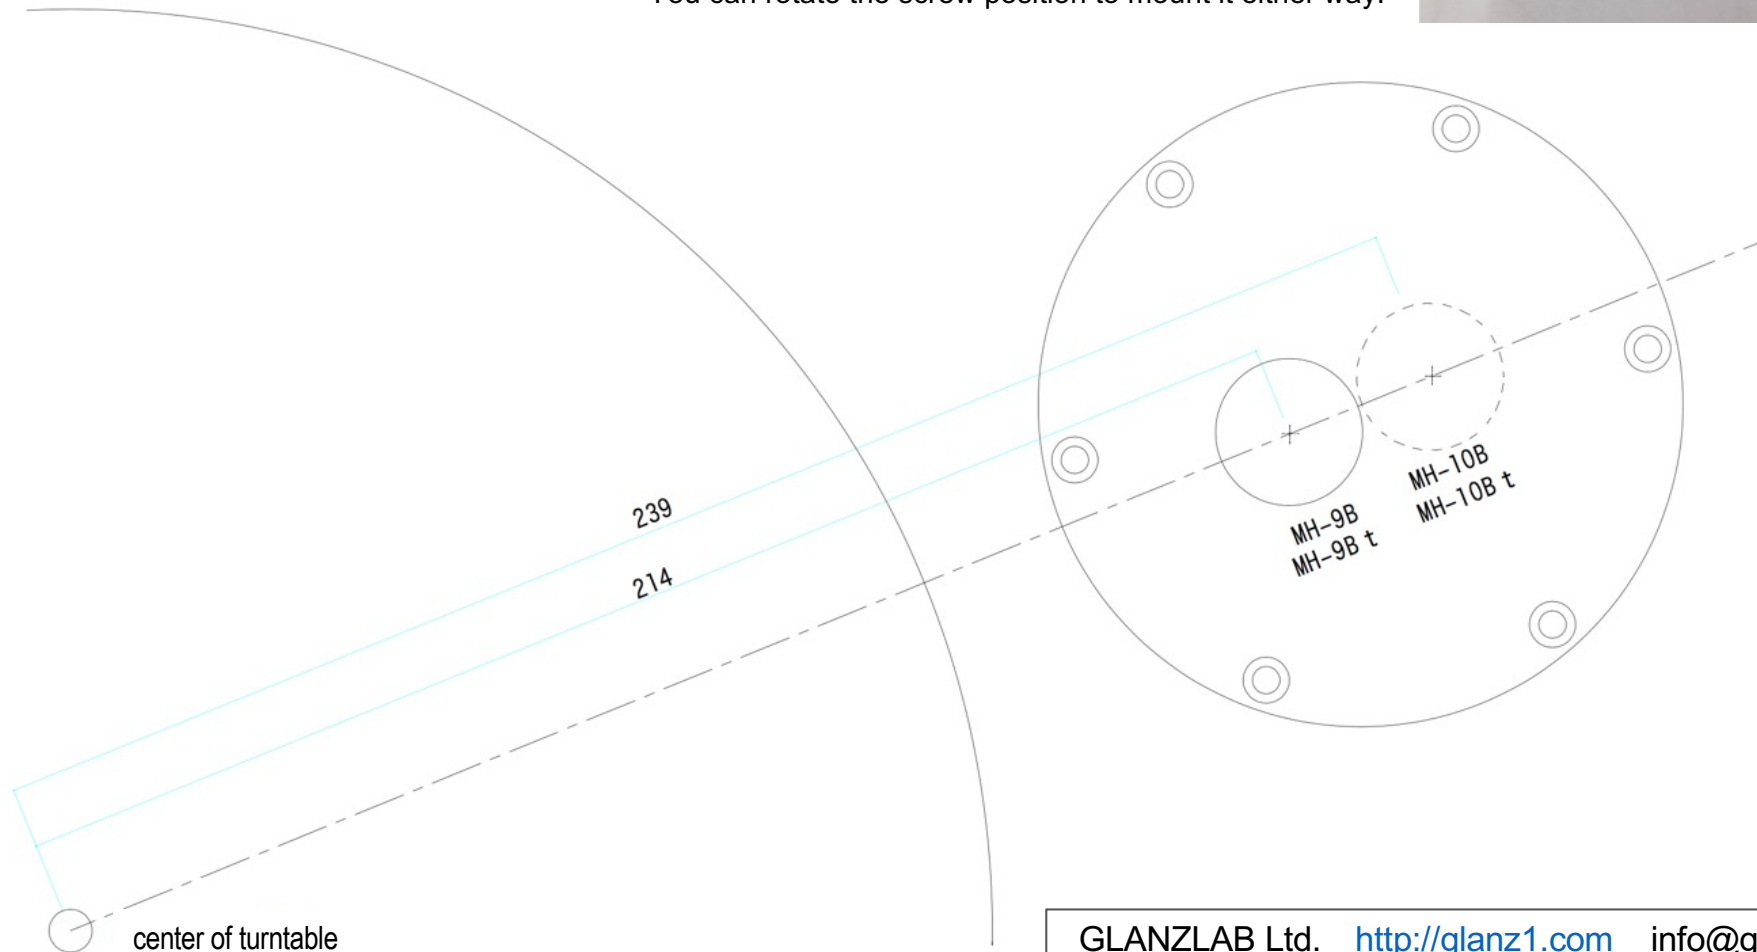

MH-SME24 (φ24mm)


Option base plate to attach to SME Plate for trial listening. It does not deliver 100% of its potential sound quality.

material : stainless steel

mounting hole diameter : φ24mm

size : φ90mm | thickness : 5mm

weight : 0.23kg

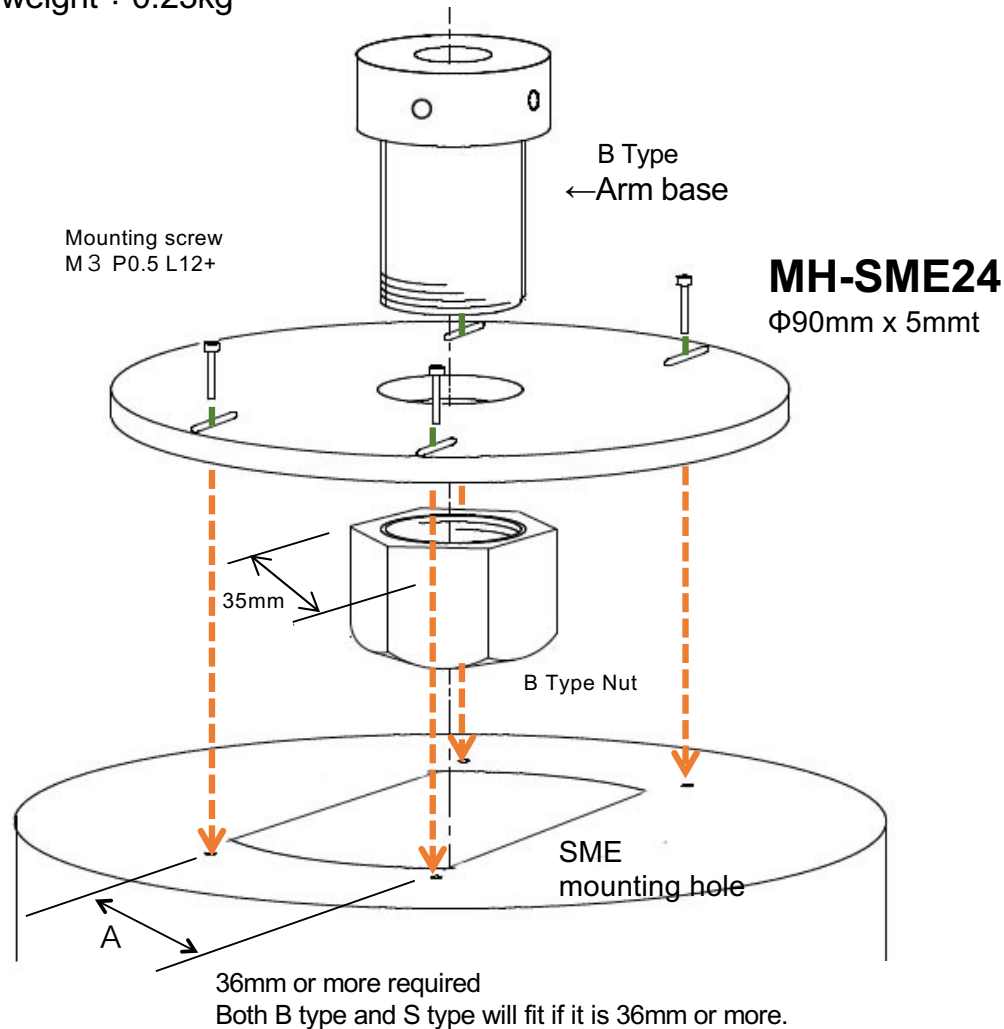


NOTE A:
The SME mounting hole size (where it says "35mm or more required" in the diagram above) varies depending on the player.
If the hole width is less than 36mm, the B nut will fit, but the S nut will not fit into the hole.
Please check the hole size in advance.

Replace flat washer with MH-SME24




Replace the flat washer
with this product.



Attach to SME plate using mounting screws



This product is attached to the plate that comes with the player. Some players do not have a mounting plate and have holes in the board.

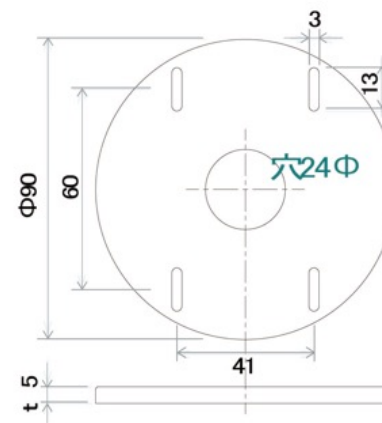

MH-SME30 ($\phi 30\text{mm}$)


Option base plate to attach to SME Plate for trial listening. It does not deliver 100% of its potential sound quality.

material : stainless steel

mounting hole diameter : $\phi 30\text{mm}$

size : $\phi 90\text{mm}$ | thickness : 5mm



weight : 0.22kg

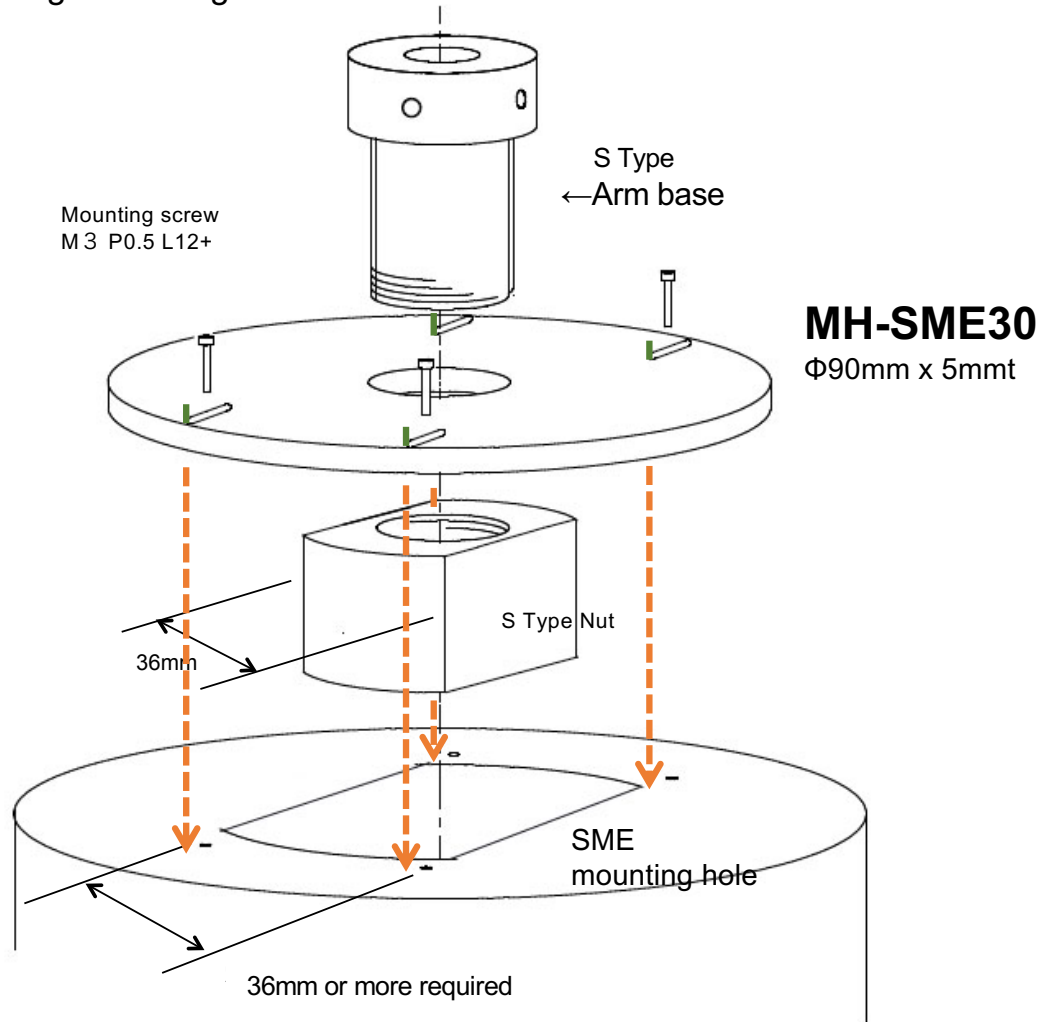

NOTE A:


The SME mounting hole size (where it says "36mm or more required" in the diagram above) varies depending on the player. If the hole width is less than 36mm, the mounting nut will not fit into the hole. Please check the hole size in advance. If the hole width is less than 36mm, please use the MH-16SME base (sold separately by us).

Replace S base plate with MH-SME30

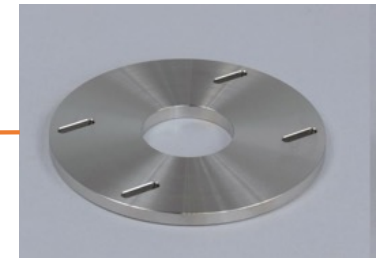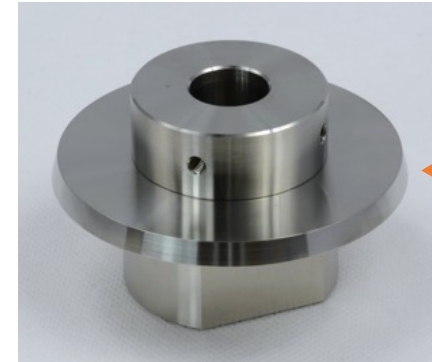


Please replace only the base plate.

Attach to SME plate using mounting screws

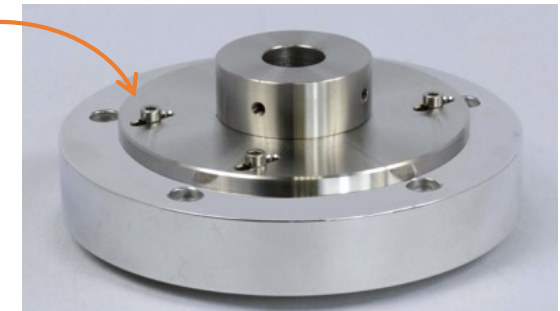

This product is attached to the plate that comes with the player. Some players do not have a mounting plate and have holes in the board.

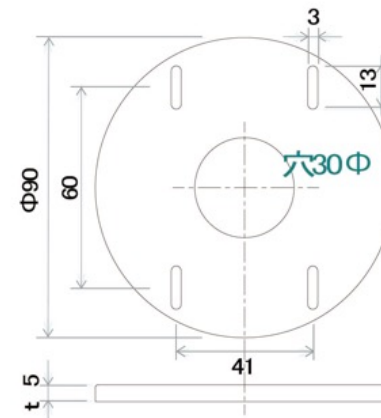

MH-SME16S (Arm mounting hole $\phi 16\text{mm}$)

Base Designed Exclusively for SME Mounting Holes

tonearm : 9, 10, 12 inch | B/Bt and S/Premium SUS/KATANA Type

material : stainless steel


arm mounting hole : $\phi 16\text{mm}$

size : 90mm x 52mm | thickness (plate) : 7mm | (overall) : 33mm

weight : 0.33kg

Mounting the Arm on the MH-SME16S.

The positions of the 9-, 10-, and 12-inch holes can be fine-tuned by sliding them.

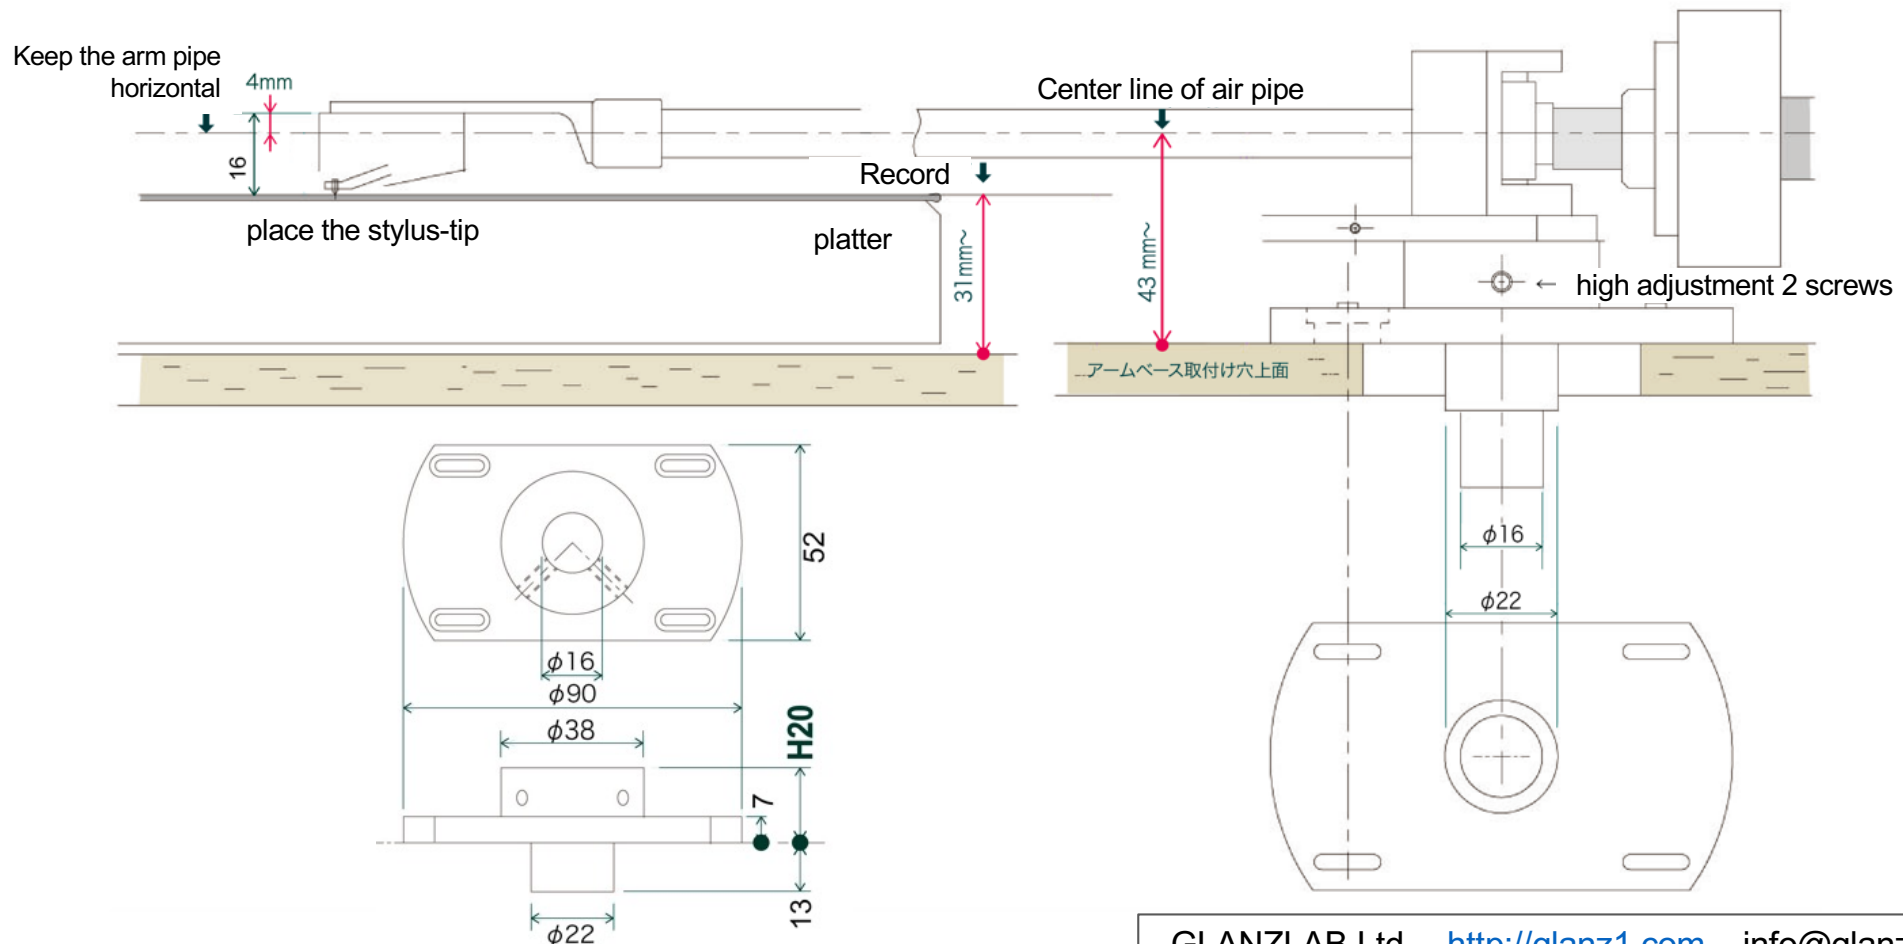

MH-GINGA (Arm mounting hole $\phi 16\text{mm}$)

Base Designed Exclusively for SME Mounting Holes

tonearm : 9, 10, 12 inch | B/Bt and S/Premium SUS/KATANA Type

material : stainless steel




arm mounting hole : $\phi 16\text{mm}$

size : 90mm x 52mm | thickness (plate) : 10mm | (overall) : 33mm

weight : 0.45kg

Mounting the Arm on the MH-GINGA.

The positions of the 9-, 10-, and 12-inch holes can be fine-tuned by sliding them.

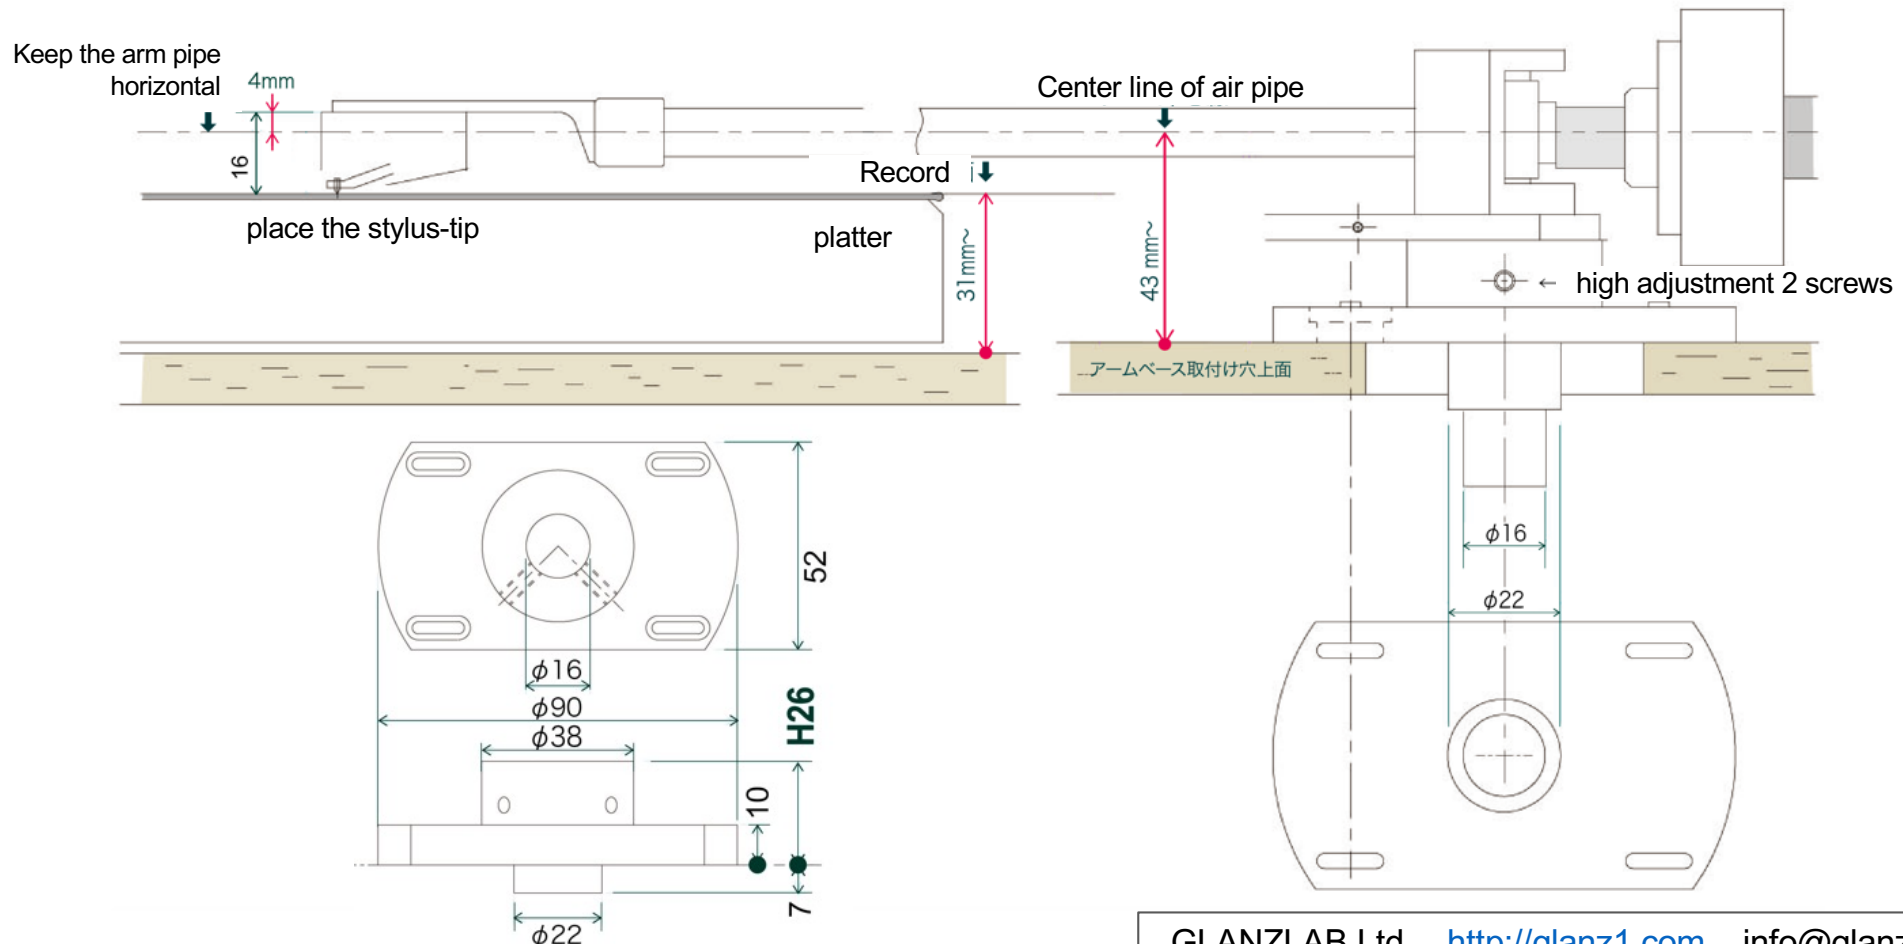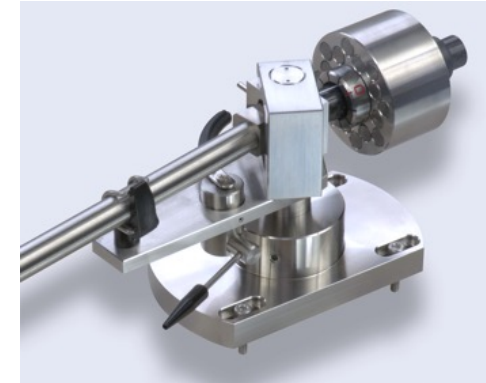
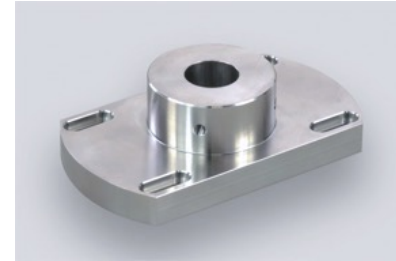


MH-12T1 (φ30mm)

GLANZLAB

tonearm : 9, 10, 12 inch | S/Premium SUS/KATANA Type
player model number : ESOTERIC Grandioso T1
material : stainless steel
mounting hole diameter : φ30mm
size : 127mm x 122mm | thickness : 14mm
weight : 1.1kg

For installation on the rear post (left), please refer to the notes below.

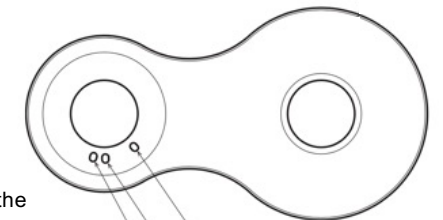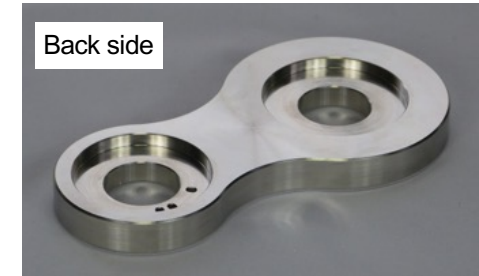


This hole will go into the arm base post pin.

12 inch positioning hole
10 inch positioning hole
9 inch positioning hole

STEP 1

Remove the tone arm from the arm base. Next, loosen the arm base mounting screws and remove the existing arm base to expose the arm base posts.






Arm base post

STEP 2

The inclination of the arm base varies depending on the length (inches) of the tone arm to be installed. Therefore, please refer to the following when installing this product MH-12T1.

The pins fit into the holes on the back of the arm base (12 inch, 10 inch, and 9 inch each) and the position is fixed, so there is no need to use the mounting template included in our tone arm packaging for alignment.



Arm base alignment

STEP 3

Tighten the arm base mounting screw to secure the arm base. Please make sure that there is no wobbling in the arm base after installation.

STEP 4

Attach the tone arm to the arm base.
For installation instructions, please refer to the tone arm instruction manual.

NOTES

An arm base kit (Esoteric AB-T1GL1: 275,000 yen (excluding tax)) is required for installation on the rear post (left).
Please check the Esoteric website for details.

MH-12YUKI (φ30mm)

tonearm : 12 inch | S/Premium SUS/KATANA Type
player model number : YUKI-01, AP-01EM(Armless Model)
material : stainless steel
mounting hole diameter : φ30mm
size : 173mm x 129mm | thickness : 17mm
weight : 1.82kg

- Remove the plate on the left rear of the player. Loosen the M4 screws on the back and remove it.
- Please install the MH-12YUKI.
- After attaching the plate, attach the tonearm base, and then attach the tonearm itself.



After removing the plate behind the left side of the player.

Please contact YUKI directly, if you wish to mount it on the rear right post.



MH-4S (Headshell)

Material : Machined stainless steel (integrated shell and plug construction)

Weight : 12 g (including lead wires and screws)

Lead wires : OFC stranded wire (Red, Green, White and Blue)

Mounting screws :

Stainless steel, $\phi 2.6 \times 16$ mm (2 screws)



Stainless steel, $\phi 2.6 \times 12$ mm (2 screws)

Stainless steel nuts, $\phi 2.6$ (2 nuts)

Accessories : L wrench



1. Fix the position of both the headshell finger lift and the cartridge using a 2.6mm screw to ensure a distance of 50mm (± 3 mm) between them. See diagram below.
2. Customers do not need to tighten the screws excessively, as the central gravitational point of the cartridge is held firmly by the headshell, due to the relative narrow width of the headshell. We recommend that you do not tighten the screws too firmly, as Glanz has deliberately selected stainless steel screws in order to enhance sound quality.
3. Connect the lead wires from the cartridge to the inner terminals of the headshell, as shown in the diagram below. (Diagram shows the position of the wires facing the inner terminal from the cartridge)
4. Do not remove the black rubber attached to the upper plate of the headshell, as this works as an essential damper.
5. Do not insert any rubber at the connection point between the headshell terminal and the tonearm pipe, as Glanz recommends direct mechanical contact at this connection point.

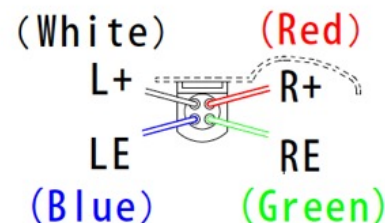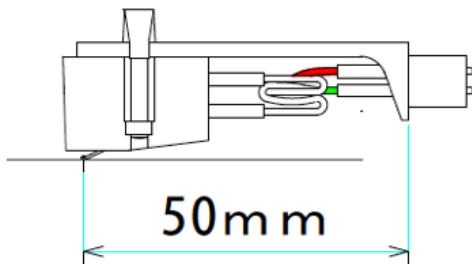

Developed in pursuit of original sound, without compromising to have comfortable sound balance, which sacrifices transient response. Whole headshell shape is designed by myself, heavily counting on sound quality, to be hand-made courteously, absolutely denying mass production.

<Mechanical vibrating system>

You enjoy sharp sound quality with high transient response, made of special stainless steel for body. Having visualised compatibility between contradictory factor of stiffness and less weight by monocoque design in whole parts, including plug, making equivalent with almost aluminum body in weight. Anti-vibration structure, installing proper dumping rubber to kill stainless metal sound.

Connecting surface area with cartridge was made narrow to grasp and fix its heart of electro-motive parts. Fixing screws are also made of stainless steel.

<Lead wires and terminal>

Lead wires are 6N-OFC, while wire insulators are relatively hard material to cut mechanical vibration. Terminals are all rhodium coating.